



REVISION: B1

Product Overview

A splash proof surface mount LED spotlight fitting with 135° rotation.

The UFO LB2 fitting features a sleek design and is suitable for both indoor and outdoor use.


Supplied with a mounting bracket that allows the fitting to be secured to any mounting surface and angled to the precise direction required.

The LB2 is manufactured from hard anodised aluminium and can then be powdercoated for the ultimate protection from the elements.



Technical Information

Colour Temperatures & Typical CRI Values	2700K - 98CRI 4000K - 95CRI	3000K - 98CRI 5700K - 91CRI
Power Consumption	1.6W per fitting, not inc. driver	
Voltage	3.2V nominal @ 500mA	
Driver Options	No dimming Local dimming	0-10V dimming Remote dimming
Lumens per Watt (13.5° lens)	2700K - 46lm/W 4000K - 54lm/W	3000K - 51lm/W 5700K - 73lm/W
Lens Options	13.5° / 19° / 28°	
LED Life	50,000 hours	
Material	Hard anodised aluminium	
Available Finishes	Powdercoat Black, white, silver or custom Hard anodised silver	

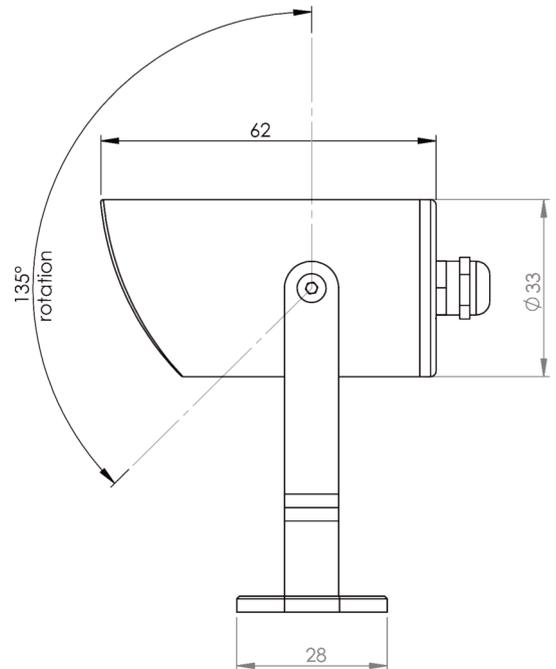

Ordering Code Selector

MODEL TYPE	OPTICS	COLOUR TEMP	FINISHES	COLOUR
UFO LB2	13.5° 13	2700°K 27	Hard Anodised ^[1] HA	Black BL
	19° 19	3000°K 30	Powdercoat PC	White WH
	28° 28	4000°K 40		Silver SV
		5700°K 57	Custom ^[2] CU	
UFO LB2				

e.g.: UFO LB2-13-30-PC-BL

[1] Hard anodised finish is silver only. [2] Please state RAL code for custom colour.

