

PRODUCT SPECIFICATION SHEET

UFO Nebula White Light



Rev. C9



OVERVIEW

The UFO Nebula light source is an advanced fibre optic unit with primary integral DMX control of individual LED multi-ports.

As well as full DMX addressing of each individual port, the Nebula also offers secondary manual dimming and a manual demonstration mode.

This is the ultimate light source for illuminating and controlling active display fibre optic effect lighting.

The Nebula features an LCD display which provides operator feedback for ease of use.

The Nebula is fitted with a 60 LED fibre multi-port output with 60 individually controllable fibre outputs.

Note that each fibre port can illuminate a number of individual 0.5mm or 0.25mm fibres. This makes the Nebula perfect for creating shooting star and other animated lighting displays which require numerous points of light to be effective.

DMX ADDRESSING & EFFECTS

The Nebula white light features a 60-address-mode where each individual LED can be addressed and also a single address mode where all LED's can be addressed together.

There also 8 pre-defined manually selectable programs built into the light source which provide a variety of pre-programmed animation effects.

TECHNICAL INFORMATION

UFO Product Code	UFO-NEB-WLXX Where XX = 27 / 30 / 40 / 57 / 65
No. of Port Connectors	60
Fibre Type	Glass / PMMA
Suitable PMMA Fibre Sizes Note that multi-stranded fibre is manufactured from 0.75mm diameter fibre. (Contact UFO for details of suitable glass fibre)	Solid: 0.75mm, 1mm, 1.5mm, 2mm Multi-stranded: 1.5mm (3 strand), 2.4mm (7 strand), 3.1mm (12 strand)
Number Of Solid Fibres Per Port (Based on 3.1mm active diameter)	0.75mm: 12 / 1mm: 7 / 1.5mm: 2 2mm: 1
Material	Sheet steel / Aluminium
Dimensions (L x W x H)	200mm x 260mm x 88mm
Operating Environment	Indoor only
Ambient Temperature	Min. -10°C to Max. 45°C
PSU Output	12V DC 30W (maximum)
PSU Type	Desktop Class II listed
Mains Input	100-240V AC 50-60Hz
Individual LED Power	96mW
Individual LED Lumen Output	9.6lm
Colour Temperature Options	2700K, 3000K, 4000K, 5700K, 6500K
CRI	70 (minimum)
LED Life	50,000 hours (typical)
Dimming & Output Control	DMX plus manual dimming and demo
DMX Connection	3 pin XLR sockets



IMPORTANT NOTE

Due to the Nebula requiring specially terminated fibre optics, we will only supply the light source as part of a complete system which includes the fibre harness that it will be connected to.


This is so that we can ensure the full system works as specified.




LIGHT SOURCE DIMENSIONS

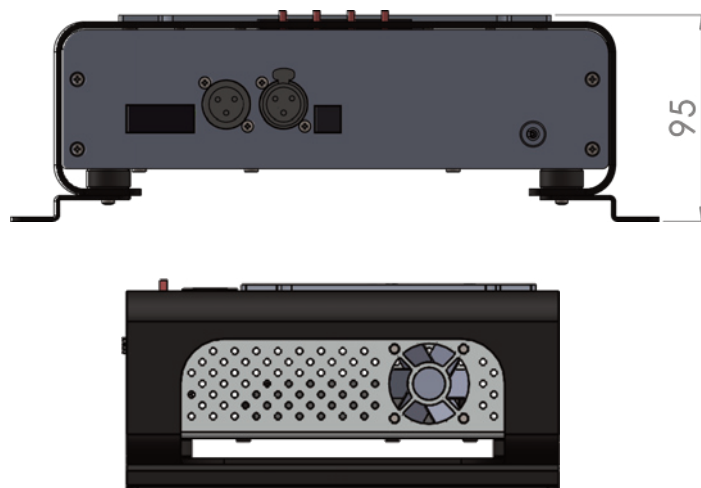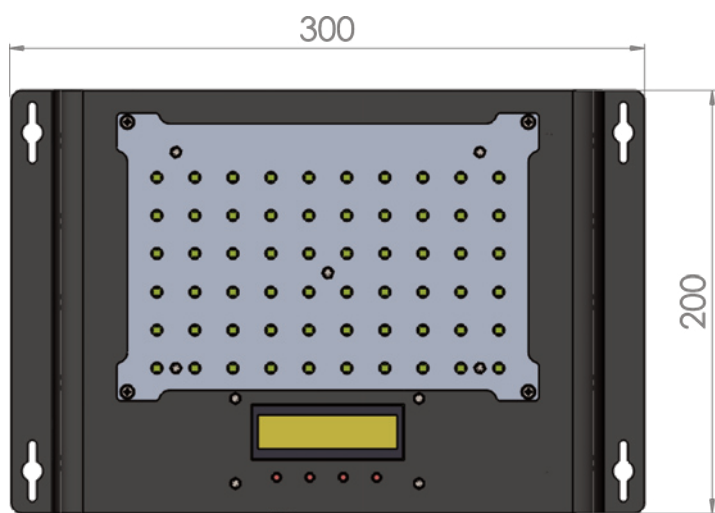

FIBRE INSTALLATION & FERRULE TYPES

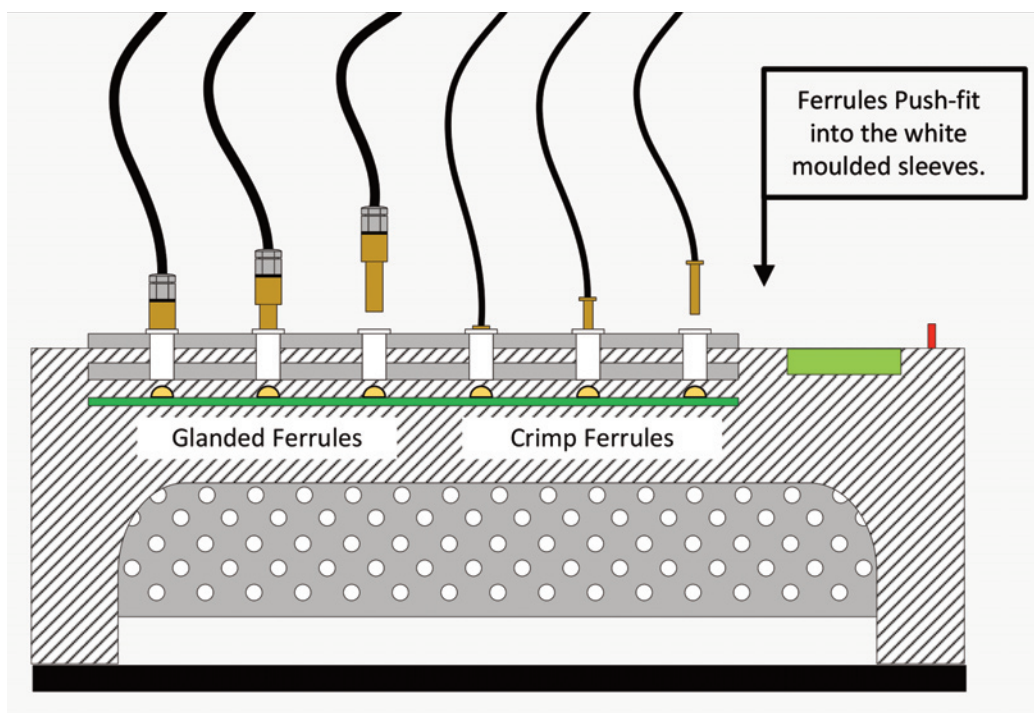

Glanded Ferrule Fibre Fitment

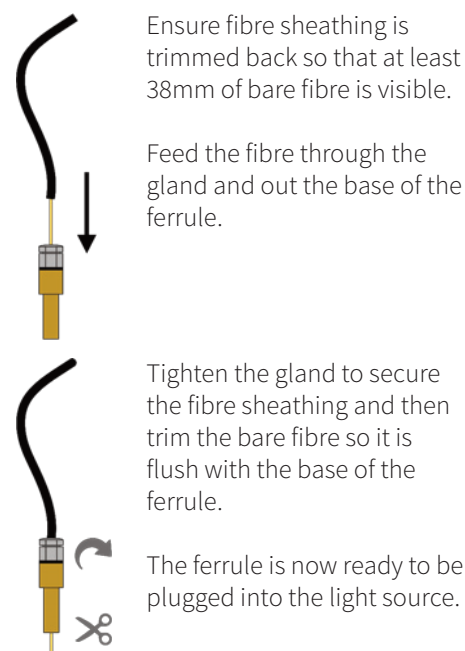

The Nebula is compatible with 2 types of ferrules - crimp and glanded.

Crimp ferrules are supplied factory terminated on the fibre harness and are simply pushed into the white moulded sleeves on the top of the light source. This option will result in enhanced light output.

Glanded ferrules are suitable for termination on site either by UFO installers or by third parties. The fibre is pushed through the gland, the gland is tightened and then the fibre is trimmed flush at the bottom of the ferrule. The ferrules are then pushed fully into the moulded sleeves.

Each ferrule sits directly above an LED which illuminates each fibre individually.

